


Instructions

RCU Rack Mount Frame WV-Q70 for WV-RC700

Panasonic

Before attempting to connect or operate this product, please read these instructions completely.

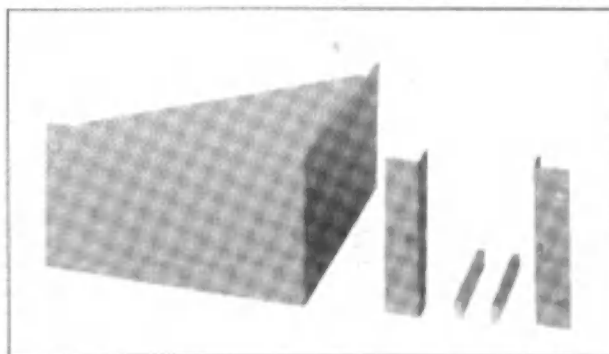


PREFACE

The RCU Rack Mount Frame WV-Q70 is provided for mounting the Remote Control Unit WV-RC700 on the EIA 19" rack.

MAJOR COMPONENT

- 1. Rack-mounting Spacer**
This is used to mount the single Remote Control Unit on the rack.
- 2. Rack Mounting Angles**
Two Rack-mounting Angles should be used to mount the double Remote Control Units on the rack.
- 3. RCU Jointing Bars**
These bars are used to joint double Remote Control Units.

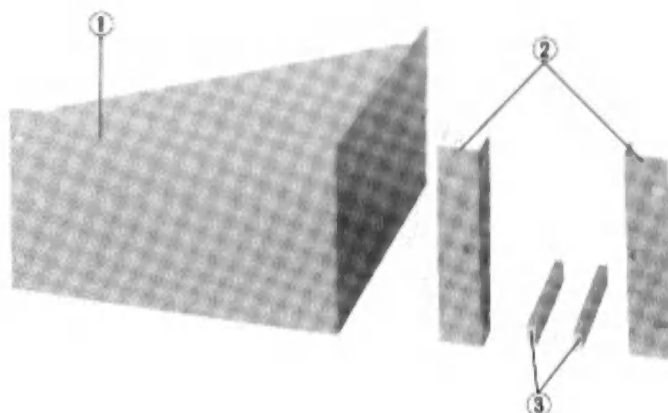

INSTALLATION

1. Mounting of the single Remote Control Unit

- 1-1. Fix one Rack-mounting Angle(1) to the either side by using two screws (M4×10, provided).
- 1-2. Attach the Rack-mounting Spacer(2) to the Remote Control Unit by using four screws (Two M5×10 and two M4×10, provided).
- 1-3. Mount the Remote Control Unit onto the EIA 19" rack by using four rack mounting screws (not provided) as shown in Fig. 1.

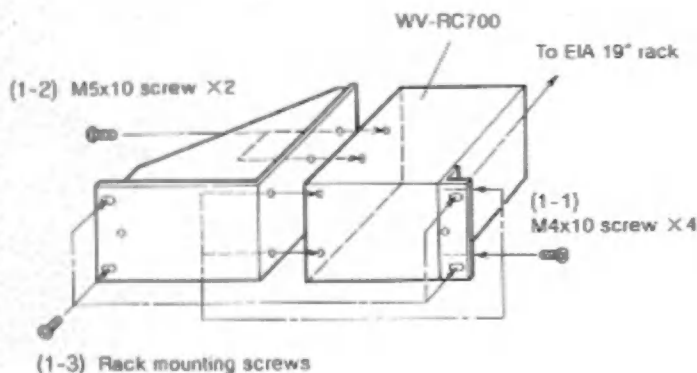


Fig. 1

2. Mounting of double Remote Control Units.

- 2-1. Fix two RCU Jointing Bars(3) on the side of Remote Control Units by using four screws (M5×16, provided) as shown in Fig.2.

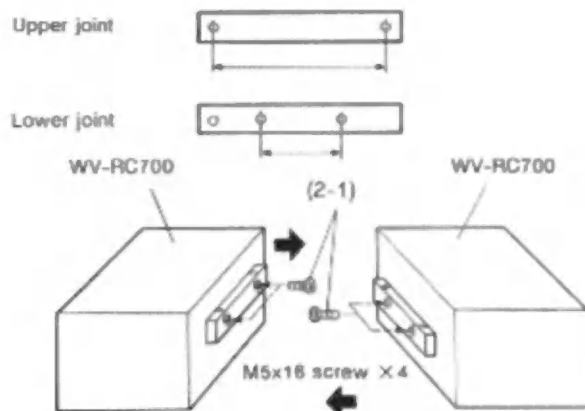


Fig. 2

- 2-2. Attach two Remote Control Units by using four screws (M4 × 25, provided), as shown in Fig.3.
- 2-3. Fix two Rack Mounting Angles(1) on both side of the jointed Remote Control Units.
- 2-4. Mount two Remote Control Units onto the EIA 19" rack by using four rack mounting screws (not provided).

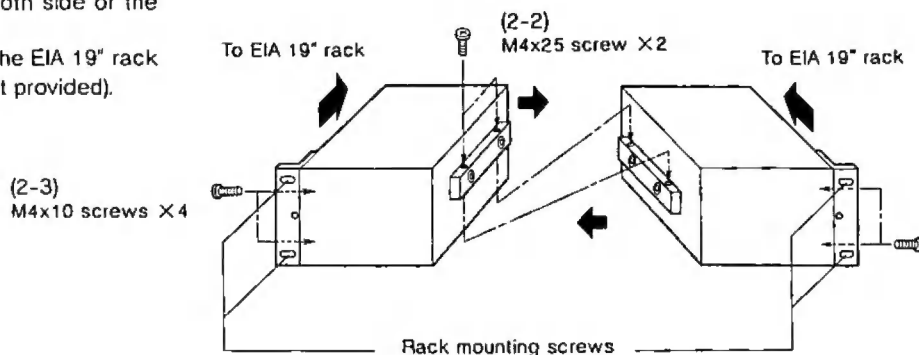


Fig. 3

COMPOSITION

Rack Mounting Angle	2 pcs.
RCU Jointing Bar	2 pcs.
Rack-mounting Spacer	1 pc.

SPECIFICATIONS

Dimensions :

Rack-mounting Spacer :	9-9/16"(W) × 5-3/16"(H) × 11"(D) 243.5mm(W) × 132mm(H) × 280mm(D)
RCU Mounting Angle :	1-1/8"(W) × 5-3/16"(H) × 1-1/8"(D) 30mm(W) × 132mm(H) × 30mm(D)
RCU Jointing Bar :	4-11/16"(W) × 9/16"(H) × 5/16"(D) 120mm(W) × 15mm(H) × 7.5mm(D)

Weights :

Rack-mounting Spacer :	3.5 lbs.(1.6 kg)
------------------------	------------------

Dimensions and weights are approximate.

Specifications are subject to change without notice.

STANDARD ACCESSORIES

M5 × 10 Screw	2 pcs.
M5 × 16 Screw	4 pcs.
M4 × 25 Screw	2 pcs.
M4 × 10 Screw	4 pcs.

Panasonic

Communications & Systems Company

Division of Matsushita Electric Corporation of America

PROFESSIONAL/INDUSTRIAL VIDEO

HEADQUARTERS:

50 Meadowland Parkway, Secaucus, New Jersey 07094

EASTERN ZONE:

50 Meadowland Parkway, Secaucus, NJ 07094 (201) 348-7620

CENTRAL ZONE:

425 E. Algonquin Road, Arlington Hts. IL 60005 (708) 981-4826

SOUTHERN ZONE:

Dallas Region: 4500 Aron Carter Blvd., Ft Worth, TX 76155 (817) 685-1117

Atlanta Region: 1854 Shackelford Ct. Suite 115, Norcross, GA 30093 (404) 925-6841

WESTERN ZONE:

Seattle Region: 1200 Westlake Ave. N., Suite 508, Seattle, WA 98109 (206) 285-8883

Los Angeles Region: 6550 Katella Ave., Cypress, CA 90630 (714) 373-7275

MATSUSHITA ELECTRIC OF CANADA LIMITED

5770 Ambler Drive, Mississauga, Ontario, Canada L4W 2T3 (416) 624-5010

PANASONIC SALES COMPANY

DIVISION OF MATSUSHITA ELECTRIC OF PUERTO RICO, INC.

San Gabriel Industrial Park, 65th Infantry, Ave. KM. 9.5 Carolina, Puerto Rico 00630 (809) 750-4300

N0791-0

YWV8QA2529AN

Printed in Japan